



## Run fast and efficient day in and day out.

Keep your equipment running at top notch by contacting BSI for your replacement parts and service needs.



\* Shown with optional bypass discharge conveyor



618-548-3555  
1-800-548-2253




[sales@bettendorfstanford.com](mailto:sales@bettendorfstanford.com)  
[www.bettendorfstanford.com](http://www.bettendorfstanford.com)



1370 West Main Street  
Salem, IL 62881

# New or Remanufactured 175 Over Wrapper

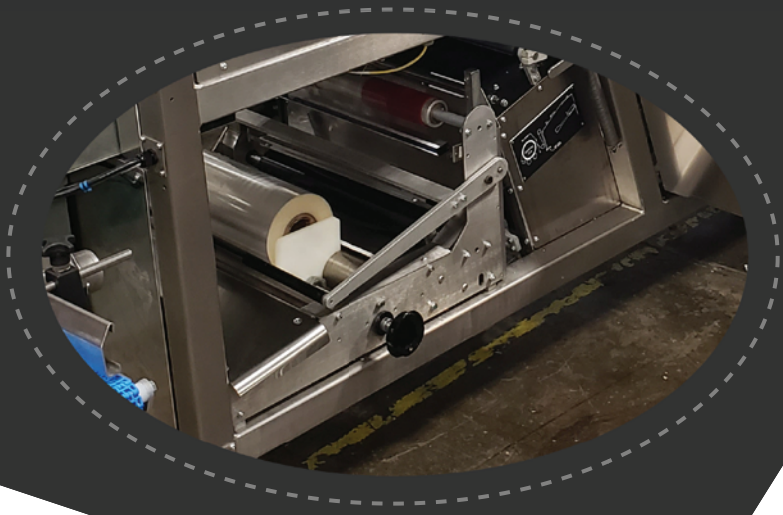

## New or Remanufactured 175 Over Wrapper Features

- Refurbished stainless steel framing
- Completely new electrical system
- All new wear components
- Only good condition castings and structural components will be refurbished
- All new guarding
- Uses the newer improved top transfer design
- Maintenance free pusher slide
- Film Suction using the Bernoulli Principle
- Servo driven width adjustment
- Servo Paper Drive
- Servo driven crossfeed
- Precision film roll drive
- Static eliminator system
- AB 5310 Panelview touchscreen
- Non Contact arc flash test point
- Graceport
- Servo driven width crossfeed

## More Features & Options

### Features

- Servo driven main drive
- Double loaf eliminator section
- Adjustable torque clutches for each drive area
- Powered teflon side belt sealers
- AB Compact Logix PLC with motion control
- Category 3 guarding and safeties

### Options

- Wrapper bypass conveyor (connects slicer straight to bagger)
- Remote lubrication fitting for easy bearing lubrication
- EWON for remote access troubleshooting
- UL approval
- Can build to CSA or CE standards

### Requirements

- Minimum loaf size: 3" x 3" x 6" (W x H x L)
- Maximum loaf size: 8" x 5-3/4" x 16" (W x H x L)
- 230 volt, 3 phase, 50/60 hz - 90 amps
- 480 volt, 3 phase, 50/60 hz - 60 amps
- 5 cfm @ 80 psi, (minimum 3/8" air line)

