



BSI Crustless Slicer


1370 West Main St.
Salem, IL 62881
Phone: 618-548-3555
Fax: 618-548-3557
Email: sales@bettendorfstanford.com
Web: www.Bettendorfstanford.com



BSI Crustless Slicer




Crustless Infeed

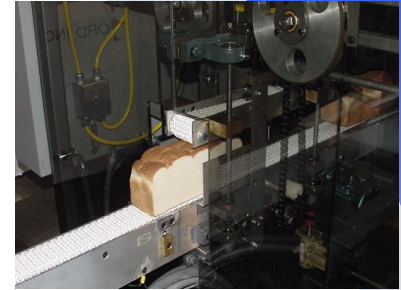


Two Side Slabber



Tipping Conveyor

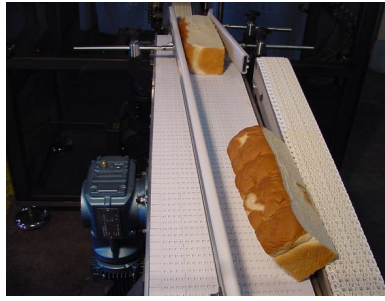

Tipping Conveyor

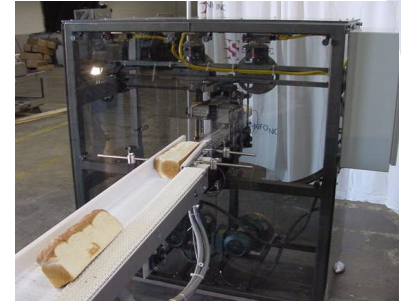

Tipping Conveyor



Tipping Conveyor



2nd Slabber



BSI Crustless Slicer

Standard Features:

- 2 Individual Units
- 1 Intermediate Tipping Conveyor
- .5 HP Drive Motors on Blades and Conveyors
- Simple Functions and Controls
- Tubular Washdown Framing
- NEMA 4 Enclosure
- DC Control Voltage
- 220/380/460 3ph 50/60Hz

Operational Features:

- Capable of Slicing up to 40 lpm
- Min/Max Dimensions: 3" to 6" Tall, 3" to 6" Wide, 6" to 20" Long
- Individually Adjusted Blades Allow the Operator to Adjust for Product
- Balanced Urethane Coated Blade Drive Wheels
- Perforated Aluminum Guarding
- VFD Drive Controls Product Speeds and Blade Speeds

Safety Features:

- Category 3 Safeties
- Coded RFID Safeties with AB Relay