



Topping Applicator



We are s/l/i/c/e/d bread!

Standard Features:

- Control Techniques servo
- Stainless steel construction
- Variable speed 3ph (customer specified voltage)




Safety Features:

- NEMA 4 enclosure
- DC control voltage
- Fastened guards and covers

Operational Features:

- 10 to 48 inch slotted tubes with 2mm, 3mm, 4mm, and 5mm slot sizes
- Automatic return of topping through undispensed tube
- Product eye for product detection
- AB PLC and HMI for timer control and adjustment
- Quick clean release slides on bottom of main hopper and return hopper for easy sanitation
- Helicoid 1/4 round or flat stock
- Powder coated stand with fixed height (adjustable +/- 4 inches)

Technical Layout:

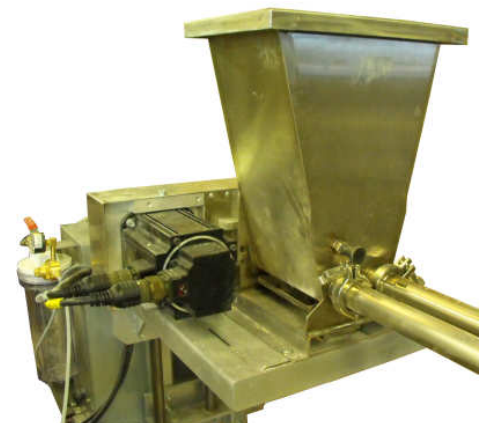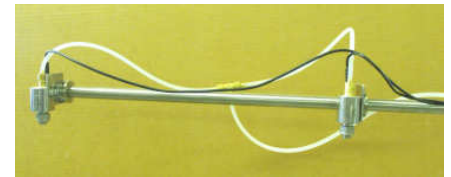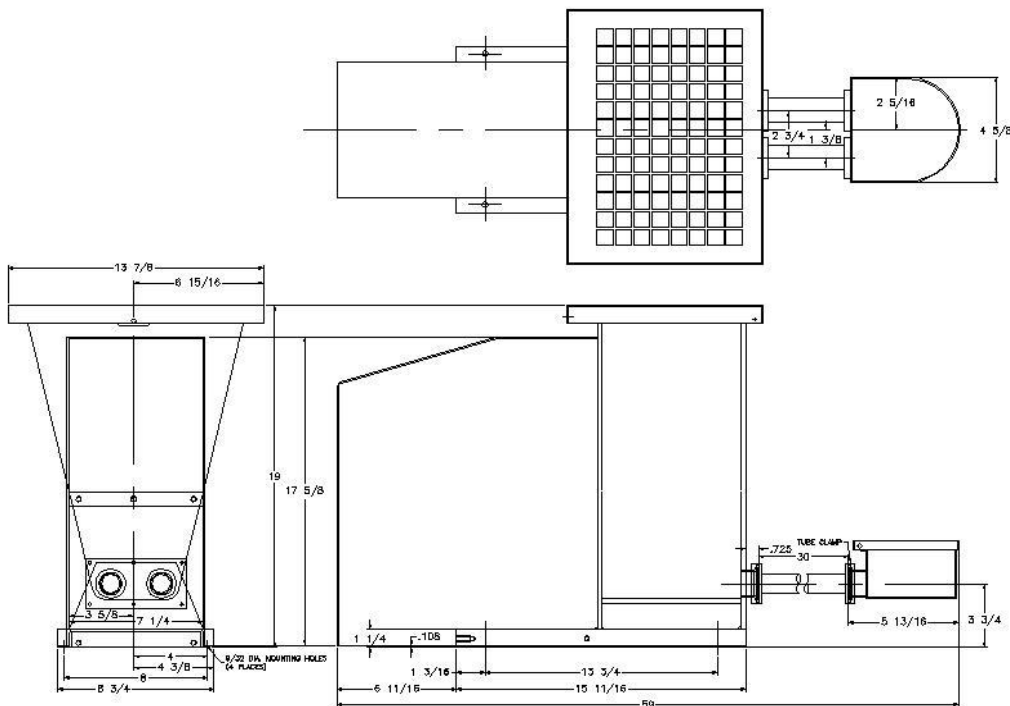

Bettendorf Stanford, Inc.
P.O. Box 790, Salem, IL 62881
E-mail: sales@bettendorfstanford.com

Phone: (800) 548-2253
Fax: (618) 548-3557
Website: www.bettendorfstanford.com